



FLEXIBLE COVER MACHINE TOOLS BELLOWS


4528

4528


PARTICLES PROJECTIONS, OIL EXPOSURE,
HIGH TEMPERATURE ENVIRONMENT



Environment

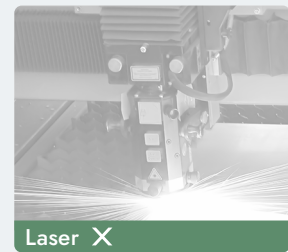

Main Specifications

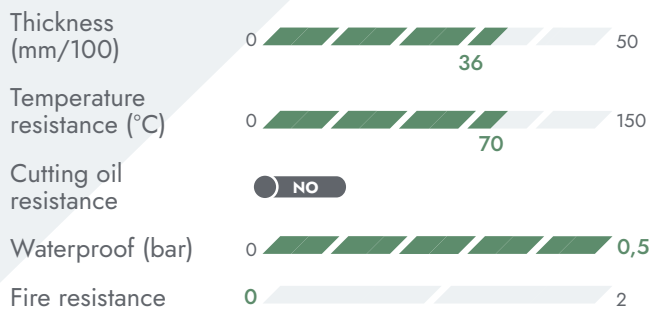

* 0 > No fire resistance | 1 > Fire extinguish | 2 > Fireproof

WELDABLE



WATERPROOF



FLEXIBLE COVER MACHINE TOOLS BELLOWS

4528

Product specifications


Base cloth	Polyester HT
Coating	PVC 2 sides
Total weight ISO NF EN 2286-2A	400g ±20 [≈11.8oz/yd ² ±0.6]
Thickness NF EN ISO 2286-3	0.36 mm ±0.03
Width	1550 mm
Colour	Black
Tear strength NF EN ISO 4674-2	Warp ≥ 2 daN Weft ≥ 2 daN
Flexure Resistance ISO 32100	Warp ≥ 60 000 Weft ≥ 60 000
Watertightness NF EN 20811	≥ 0.5 bar

Applicable Environment:

**RECOMMENDED FOR BIG
SIZE BELLOWS COVERS.**

Great folding memory and excellent weldability on PVC plates.

Bellows machine protection range

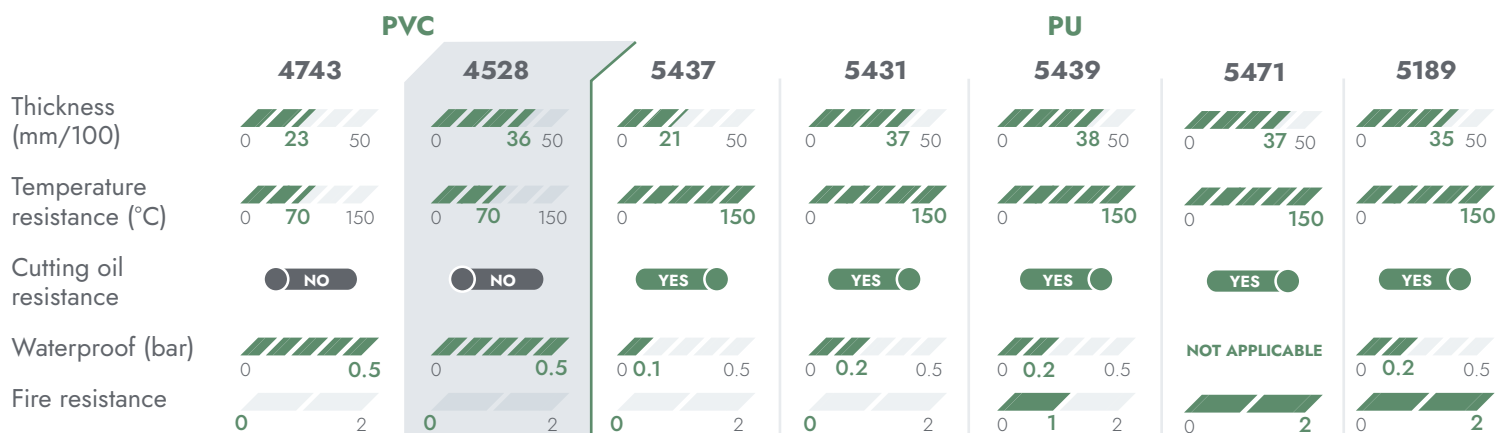

*0 > No fire resistance | 1 > Fire extinguish | 2 > Fireproof

Environmental conformities

- ◆ RoHS directive 2015/863/EU
- ◆ REACH European regulation no. 1907/2006

Due to the infinite number of applications, the customer should test and approve that the product is suitable.
This technical data sheet can be modified according to technical evolution. Please check you have the latest version. 16/09/21

